


Ultraviolet Water Systems from VIQUA

The **HOME family** of compact UV systems with integrated pre-filtration provide a **reliable** and **economical** way to treat drinking water in virtually any residential application. VIQUA's products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from 9 GPM (2 m³/hr) up to 18 GPM (4 m³/hr) for homes or small businesses.

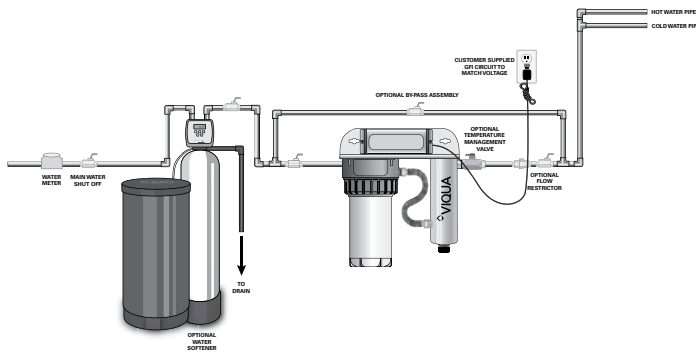

Features of VIQUA UV water systems

- Equipped to inactivate *Cryptosporidium*, *Giardia*, and *E.Coli*.
- Specially designed and tested UV lamps provide consistent and reliable ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous treatment.
- The system is easy to maintain and service with easy lamp and cartridge replacement.
- Safety-Loc™ connector with interlock that ensures power is disconnected before lamp can be removed, hidden ground wire.
- Built with a durable stainless steel chamber to prolong life and eliminate ultraviolet light degradation.

Specifications



MODEL	VH200-F10; VH200-F10/2; VH200-F10/2A, VH200-F10/2B	VH410-F20; VH410-F20/2; VH410-F20/2A; VH410-F20/2B
FLOW RATES (@ 95% UVT)		
US Public Health (16 mJ/cm ²)	16 GPM (60 lpm) (3.6 m ³ /hr)	34 GPM (120 lpm) (7.8 m ³ /hr)
VIQUA Standard (30 mJ/cm ²)	9 GPM (34 lpm) (2.0 m ³ /hr)	18 GPM (70 lpm) (4.2 m ³ /hr)
NSF/EPA (40 mJ/cm ²)	7 GPM (26 lpm) (1.6 m ³ /hr)	14 GPM (54 lpm) (3.3 m ³ /hr)
DIMENSIONS		
Overall	17" x 10.5" x 18" (43 cm x 26 cm x 45 cm)	17" x 10.5" x 28" (43 cm x 26 cm x 71 cm)
Controller	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)	7.25" x 3.25" x 2.5" (18.6 cm x 8.1 cm x 6.4 cm)
Inlet/Outlet Port Size	1" MNPT INLET / 1" x 3/4" COMBO OUTLET*	1" MNPT INLET / 1" x 3/4" COMBO OUTLET*
Shipping Weight	26 lbs (11.8 kg)	32 lbs (14.5 kg)
ELECTRICAL		
Voltage	100-240V / 50/60 Hz	100-240V / 50/60 Hz
Power Consumption	35 W	60 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)
Influent Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)
FEATURES		
Visual "Power On"	YES	YES
Chamber Material	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES
Audible Lamp Failure	YES	YES
Audible Lamp Replacement Reminder	YES	YES
UV Sensor	NO	NO
Filter Housing	10" High Flow	20" High Flow

* /2B - BSP

Replacement Parts

S200RL-HO – UV lamp for VH200-F10	BA-ICE-CL – controller for VH200-F10 and VH410-F20
S410RL-HO – UV lamp for VH410-F20	CMB-510-HF – sediment cartridge for VH200-F10
QS-001 – quartz sleeve for VH200-F10	CMB-520-HF – sediment cartridge for VH410-F20
QSO-410 – quartz sleeve for VH410-F20	


Water Quality Parameters

Hardness
< 7 grains (120 mg/L)

Iron
< 0.3 mg/L

Tannins
< 0.1 mg/L

VH200-F10 & VH410-F20 DOSE CURVES

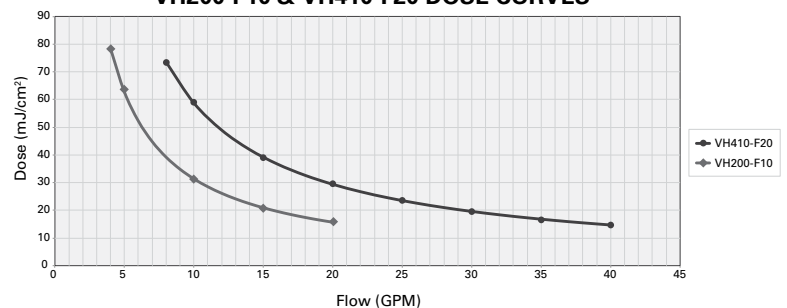

425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1
 t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN)
 t. +31.73.747.0144 (EUR) • info@viqua.com • www.viqua.com

LIT-520332-R_RevB © 2018 VIQUA - a Division of Trojan Technologies Group ULC

